

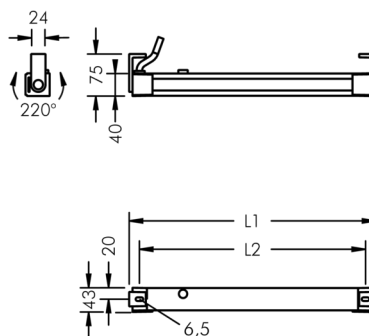


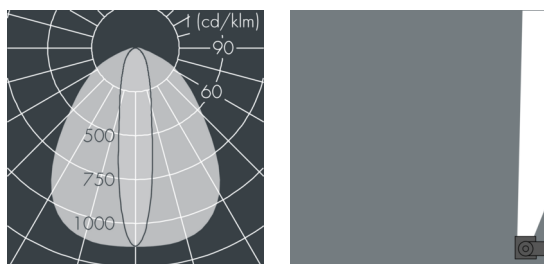

## Ecoline Mini

8 766 365 209

1,5 × 1,8 W, 1536 lm, 4000 K neutral white, 1-10V, wall washer 20° / 88° ,

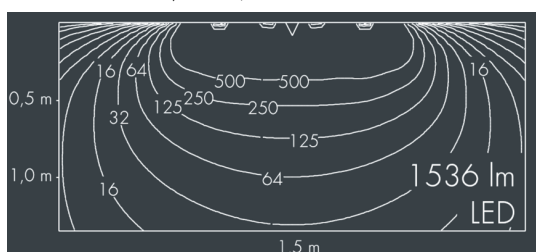

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, polycarbonate cover, with partial frosting for uniform light diffraction, silicon gasket, mounting flanges: 2 elongated holes Ø 6.5, spacing L2, tilt range: 220°, cable gland: M16, with 1 m cable gland ÖLFLEX Robust 210 5G1, connecting terminal: 5 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks , integral driver (dimmable 1-10V), CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 20° / 88°, luminous flux: 1536 lm, wattage: 26 W, delivered lumens 59 lm/W, protection type IP65, protection class I, impact resistance IK10, windage area 0,059 m², dimensions (L×H×W): 1550 × 43 × 40 mm, weight 3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

⚡ IP65 IK10

## Specification

|                            |                      |                             |                   |
|----------------------------|----------------------|-----------------------------|-------------------|
| Wattage                    | 26 W                 | Beam angle (FWHM)           | 20° / 88°         |
| Delivered lumens           | 59 lm/W              | Housing colour              | white RAL 9002    |
| Light source               | LED 4000 K           | Power supply cable          | Ø 5 – 9 mm        |
| Color Rendering Index      | CRI > 80             | Protection type             | IP65              |
| Colour tolerance           | max 2 SDCM           | Protection class            | I                 |
| Lifetime ta 25° C          | L90/B10 > 50.000 h   | Impact resistance           | IK10              |
| Control gear               | 1-10V                | Windage area                | 0,059m²           |
| Input voltage AC           | 220 – 240 V          | Dimensions                  | 1550 × 43 × 40 mm |
| Input voltage DC           | 195 – 240 V          | Weight                      | 3,00 kg           |
| Voltage protection         | 2 kV L/N   4 kV L/PE | Max. ambient temperature ta | 50°               |
| Luminaires per B16A / C16A | 50 / 85              |                             |                   |