



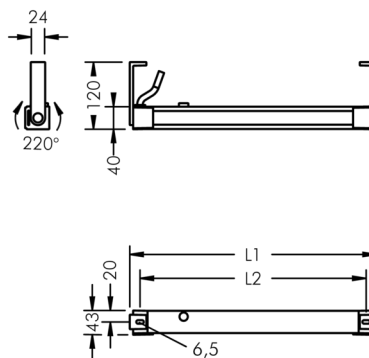

8 767 056 009



Specification text

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



IP 65 IK 10

Specification

Wattage	11 W	Beam angle (FWHM)	20° / 88°
Delivered lumens	53 lm/W	Housing colour	silver grey
Light source	LED 3000 K	Power supply cable	Ø 5 – 9 mm
Color Rendering Index	CRI > 80	Protection type	IP65
Colour tolerance	max 2 SDCM	Protection class	I
Lifetime at 25° C	L90/B10 > 50.000 h	Impact resistance	IK10
Control gear	on / off	Windage area	0,025m²
Input voltage AC	220 – 240 V	Dimensions	668 × 43 × 40 mm
Input voltage DC	195 – 240 V	Weight	1,50 kg
Voltage protection	2 kV L/N 4 kV L/PE	Max. ambient temperature ta	50°
Luminaires per B16A / C16A	50 / 85		