

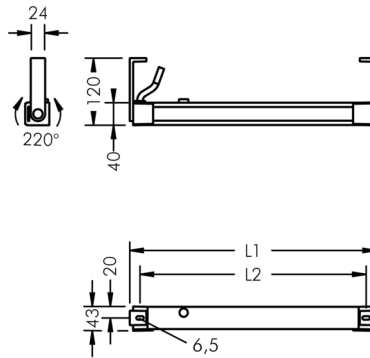


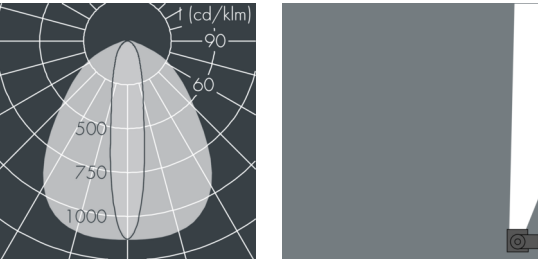

Ecoline Mini

8 767 365 109
1,5 × 1,8 W, 1536 lm, 4000 K neutral white, DALI,
wall washer 20° / 88° ,

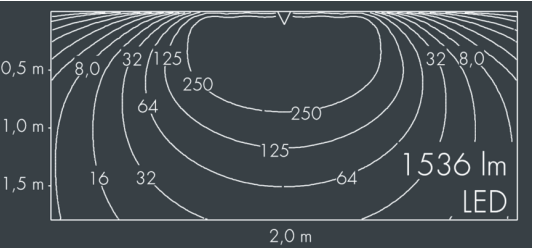

Customized solutions and modifications are possible: Special RAL,
DB or NCS colours as polyester powder coat, luminaires in
2700 K and other colour temperatures and versions for high
ambient temperature.

Specification text

housing made of extruded aluminum and corrosion-resistant
die-cast aluminum AlSi12, polyester powder coated by
high-quality and UV-stabilized coating process, Colour: white RAL
9002, all exterior parts are stainless steel, polycarbonate cover,
with partial frosting for uniform light diffraction, silicon gasket, wall
arms: 2 elongated holes Ø 6.5 mm, spacing L2, tilt range: 220° ,
cable gland:
M16, with 1 m cable gland ÖLFLEX Robust 210 5G1,
connecting terminal: 5 pole, highly efficient optics made of
transparent thermoplastic for precise lighting tasks , integral,
dimmable driver (DALI), CRI > 80, max 2 SDCM,
service life L90/B10 > 50.000 h,
Beam angle (FWHM): 20° / 88° , luminous flux: 1536 lm,
wattage: 26 W, delivered lumens 59 lm/W, protection type
IP65, protection class I, impact resistance IK10, windage area
0,059 m², dimensions (L×H×W): 1550 × 43 × 40 mm, weight
3 kg

The modular luminaire design makes the replacement of
components possible. The product meets the demands of the
applicable EU guidelines and product safety regulations and
bears the CE mark.

⚡ IP65 IK10

Specification

Wattage	26 W	Beam angle (FWHM)	20° / 88°
Delivered lumens	59 lm/W	Housing colour	white RAL 9002
Light source	LED 4000 K	Power supply cable	Ø 5 – 9 mm
Color Rendering Index	CRI > 80	Protection type	IP65
Colour tolerance	max 2 SDCM	Protection class	I
Lifetime ta 25° C	L90/B10 > 50.000 h	Impact resistance	IK10
Control gear	DALI	Windage area	0,059m²
Input voltage AC	220 – 240 V	Dimensions	1550 × 43 × 40 mm
Input voltage DC	195 – 240 V	Weight	3,00 kg
Voltage protection	2 kV L/N 4 kV L/PE	Max. ambient temperature ta	50°
Luminaires per B16A / C16A	50 / 85		