


12 x 2,5 W, 2118 lm, 3000 K warm white, DALI,
wall washer 12° / 108°.

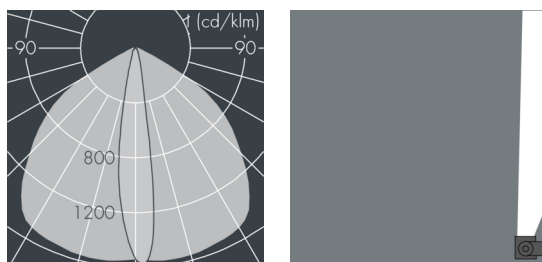

   IP 67 IK 10

Wattage	30 W	Beam angle (FWHM)	12° / 108°
Delivered lumens	71 lm/W	Housing colour	white RAL 9002
Light source	LED 3000 K	Power supply cable	Ø 6 – 10 mm
Color Rendering Index	CRI > 80	Protection type	IP67
Colour tolerance	max 2 SDCM	Protection class	I
Lifetime ta 25° C	L90/B10 > 50.000 h	Impact resistance	IK10
Control gear	DALI	Windage area	0,1 m²
Input voltage AC	220 – 240 V	Dimensions	1262 × 58 × 54 mm
Input voltage DC	220 – 240 V	Weight	3,60 kg
Voltage protection	1 kV L/N 2 kV L/PE	Max. ambient temperature ta	40°
Luminaires per B16A / C16A	28 / 46		