
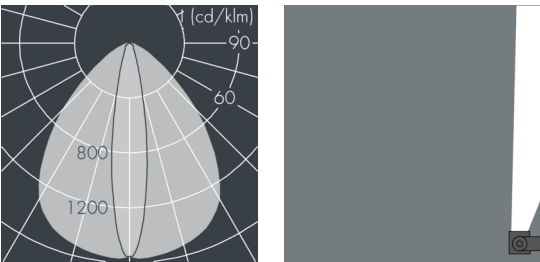


**Ecoline modular system luminaire, middle**

8 798 359 009  
15 × 4 W, 3352 lm, RGBW all colours DMX,  
wall washer 17° / 87° ,

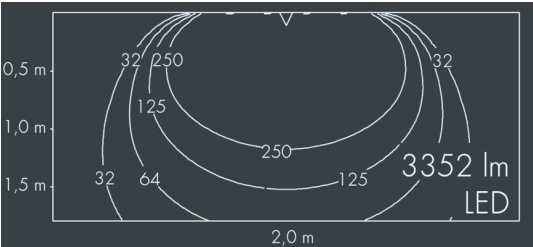

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

**Specification text**

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey , all exterior parts are stainless steel, UV stabilised, impact-resistant polycarbonate cover with partial frosting for uniform light diffraction, silicon gasket, closure with 2 stainless steel screws, with stainless steel couplings on left and right side, tilt range: 220°, cable gland: M20, connecting terminal: 6 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks , service life L70/B20 > 50.000 h, Beam angle (FWHM): 17° / 87°, luminous flux: 3352 lm, wattage: 60 W, delivered lumens 56 lm/W, protection type IP65, protection class I, impact resistance IK10, windage area 0,09 m², dimensions (L×H×W): 1542 × 54 × 54 mm, weight 5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK10

**Specification**

|                            |                      |                             |                   |
|----------------------------|----------------------|-----------------------------|-------------------|
| Wattage                    | 60 W                 | Beam angle (FWHM)           | 17° / 87°         |
| Delivered lumens           | 56 lm/W              | Housing colour              | silver grey       |
| Light source               | LED RGBW all colours | Power supply cable          | Ø 6 – 13 mm       |
| Lifetime ta 25° C          | L70/B20 > 50.000 h   | Protection type             | IP65              |
| Control gear               | DMX                  | Protection class            | I                 |
| Input voltage AC           | 120 – 250 V          | Impact resistance           | IK10              |
| Input voltage DC           | 120 – 250 V          | Windage area                | 0,09m²            |
| Voltage protection         | 2 kV L/N   2 kV L/PE | Dimensions                  | 1542 × 54 × 54 mm |
| Luminaires per B16A / C16A | 38 / 38              | Weight                      | 5,00 kg           |
|                            |                      | Max. ambient temperature ta | 45°               |