
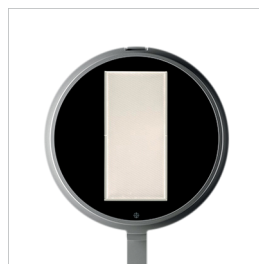
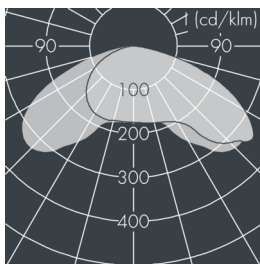


Ecoscape 1

8 292 056 109

55 W, 3971 lm, 3000 K warm white, DALI,
Comfort Optic $71^\circ / 139^\circ$

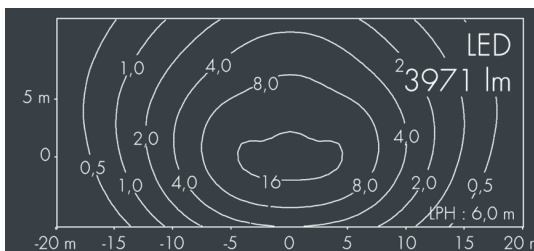

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, hinged frame, installation of luminaire using fixing accessories, cable entry: M20, fixing via a 42 mm \varnothing borehole, cable gland: M20, with 8 m cable Ho7RN-F5G1, connecting terminal: 5 pole, micro-prism optic directs light under defined angles and achieves, together with shielded LEDs, perfect glare control, integral programmable and dimmable driver (DALI / StepDim / AstroDim), CRI > 80, max 2 SDCM, service life $L_{90/B10} > 50.000$ h, Beam angle (FWHM): $71^\circ / 139^\circ$, luminous flux: 3971 lm, wattage: 55 W, delivered lumens 72 lm/W, protection type IP67, protection class I, impact resistance IK09, windage area 0,11 m², dimensions: $\varnothing 375$ mm, width 103 mm, weight 6.5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



IP67 IK09

Specification

Wattage	55 W	Beam angle (FWHM)	$71^\circ / 139^\circ$
Delivered lumens	72 lm/W	Housing colour	silver grey
Light source	LED 3000 K	Power supply cable	$\varnothing 5 - 14$ mm
Color Rendering Index	CRI > 80	Protection type	IP67
Colour tolerance	max 2 SDCM	Protection class	I
Lifetime ta 25° C	$L_{90/B10} > 50.000$ h	Impact resistance	IK09
Control gear	DALI	Windage area	0,11 m ²
		Dimensions	$\varnothing 375$ mm, width 103 mm
		Weight	6,50 kg
		Max. ambient temperature ta	45°