

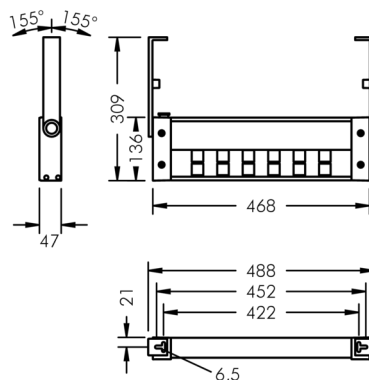




8 707 145 009



### Specification text

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP 65 IK 10

## Specification

|                            |                      |                             |                   |
|----------------------------|----------------------|-----------------------------|-------------------|
| Wattage                    | 29 W                 | Beam angle (FWHM)           | 15° / 103°        |
| Delivered lumens           | 83 lm/W              | Housing colour              | black RAL 7021    |
| Light source               | LED 4000 K           | Power supply cable          | Ø 7 – 9 mm        |
| Color Rendering Index      | CRI > 80             | Protection type             | IP65              |
| Colour tolerance           | max 2 SDCM           | Protection class            | I                 |
| Lifetime ta 25° C          | L90/B10 > 50.000 h   | Impact resistance           | IK10              |
| Control gear               | on / off             | Windage area                | 0,06m²            |
| Input voltage AC           | 220 – 240 V          | Dimensions                  | 470 × 47 × 135 mm |
| Input voltage DC           | 220 – 240 V          | Weight                      | 3,40 kg           |
| Voltage protection         | 2 kV L/N   4 kV L/PE | Max. ambient temperature ta | 35°               |
| Luminaires per B16A / C16A | 50 / 51              |                             |                   |