




### Fluxa B

8 289 045 149  
2 × 79 W, 15570 lm, 4000 K neutral white, DALI,  
asymmetrical 65°

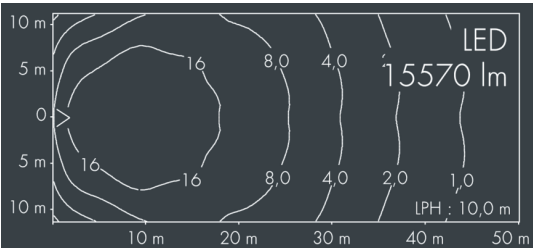

Customized solutions and modifications are possible: Special RAL,  
DB or NCS colours as polyester powder coat, luminaires in  
2700 K and other colour temperatures and versions for high  
ambient temperature.

### Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12,  
polyester powder coated by high-quality and UV-stabilized  
coating process, Colour: black RAL 7021, all exterior parts are  
stainless steel, tempered safety glass, anti-reflective coating from  
1 side, silicon gasket, closure with 4 stainless steel screws,  
powder coated aluminum mounting bracket with tilt scale: 4 holes  
Ø 8.5 mm, spacing 70 mm (120 mm), 2 drilled holes Ø 10 mm,  
spacing 200 mm, 1 centre hole Ø 22 mm, tilt range: 210°,  
cable gland: M20, connecting terminal: 5 pole, highly efficient  
anodized rotationally symmetrical reflector with matt finish,  
integral, dimmable driver (DALI), CRI > 70, max 2 SDCM,  
service life L90/B10 > 50.000 h, luminous flux: 15570 lm,  
wattage: 157 W, delivered lumens 99 lm/W, protection type  
IP65, protection class I, impact resistance IK09, windage area  
0,16 m², dimensions (L×H×W): 450 × 150 × 335 mm, weight  
9,3 kg

The modular luminaire design makes the replacement of  
components possible. The product meets the demands of the  
applicable EU guidelines and product safety regulations and  
bears the CE mark.

 IP65 IK09

### Specification

Wattage	157 W	Housing colour	black RAL 7021
Delivered lumens	99 lm/W	Power supply cable	Ø 8 – 15 mm
Light source	LED 4000 K	Protection type	IP65
Color Rendering Index	CRI > 70	Protection class	I
Colour tolerance	max 2 SDCM	Impact resistance	IK09
Lifetime ta 25° C	L90/B10 > 50.000 h	Windage area	0,16m²
Control gear	DALI	Dimensions	450 × 150 × 335 mm
		Weight	9,30 kg
		Max. ambient temperature ta	35°