




### Gemini 2

8 338 558 109

8 × 2,5 W, 913 lm, 4000 K neutral white, DALI,  
wide beam up, asymmetrical beam down  
up 45° / asymmetrical down°

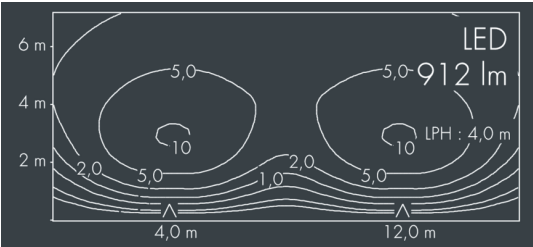

Customized solutions and modifications are possible: Special RAL,  
DB or NCS colours as polyester powder coat, luminaires in  
2700 K and other colour temperatures and versions for high  
ambient temperature.

### Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12,  
polyester powder coated by high-quality and UV-stabilized  
coating process, Colour: silver grey, all exterior parts are  
stainless steel, tempered high efficiency safety glass, anti-reflective  
coating from 1 side, dark screenprint, silicon gasket, wall box: 2  
drilled holes Ø 6 mm, spacing 75 mm, two cable entries for  
recessed or surface mounted cable Ø 7-10 mm, cable gland:  
2 x up to Ø 7-10 mm, recessed or surface mounted cable,  
connecting terminal: 5 pole, highly efficient optics made of  
transparent thermoplastic for precise lighting tasks, integral,  
dimmable driver (DALI), CRI > 80, max 2 SDCM,  
service life L90/B10 > 50.000 h,  
Beam angle (FWHM): up 45° / asymmetrical down°,  
luminous flux: 913 lm, wattage: 20 W, delivered lumens  
46 lm/W, protection type IP65, protection class I,  
impact resistance IK08, windage area 0,017 m²,  
dimensions (L×H×W): 81 × 164 × 105 mm, weight 1.2 kg

The modular luminaire design makes the replacement of  
components possible. The product meets the demands of the  
applicable EU guidelines and product safety regulations and  
bears the CE mark.

IP65 IK08

### Specification

Wattage	20 W	Beam angle (FWHM)	up 45° / asymmetrical down°
Delivered lumens	46 lm/W	Housing colour	silver grey
Light source	LED 4000 K	Power supply cable	Ø 7 – 10 mm
Color Rendering Index	CRI > 80	Protection type	IP65
Colour tolerance	max 2 SDCM	Protection class	I
Lifetime ta 25° C	L90/B10 > 50.000 h	Impact resistance	IK08
Control gear	DALI	Windage area	0,017m²
Input voltage AC	220 – 240 V	Dimensions	81 × 164 × 105 mm
Input voltage DC	210 – 255 V	Weight	1,20 kg
Voltage protection	2 kV L/N   4 kV L/PE	Max. ambient temperature ta	40°
Luminaires per B16A / C16A	50 / 85		