

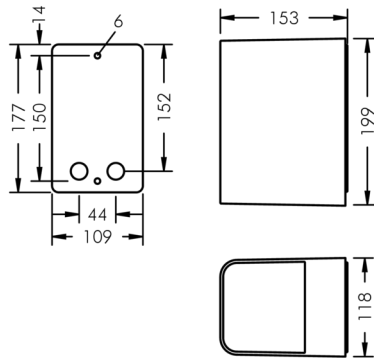





Highrise

8 365 545 189

2 x 18 W, 3089 lm, 4000 K neutral white, DALI,
wide beam up, lateral wide beam down
up58° / down 138°

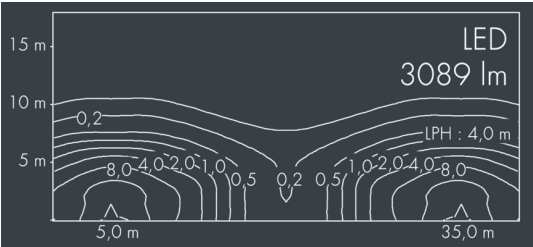

Customized solutions and modifications are possible: Special RAL,
DB or NCS colours as polyester powder coat, luminaires in
2700 K and other colour temperatures and versions for high
ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12,
polyester powder coated by high-quality and UV-stabilized
coating process, Colour: black RAL 7021, all exterior parts are
stainless steel, tempered high efficiency safety glass, anti-reflective
coating from 1 side, dark screenprint, silicon gasket, wall box
with 2 stainless steel screws, wall box: 2 drilled holes Ø 6 mm,
spacing 150 mm, cable gland: 2x Ø 7-10 mm,
connecting terminal: 5 pole, highly efficient aluminum reflector,
lens made of optical silicon, integral driver (DALI), CRI > 80,
max 3 SDCM, service life L80/B20 > 50.000 h,
Beam angle (FWHM): up58° / down 138°, luminous flux:
3089 lm, wattage: 36 W, delivered lumens 86 lm/W,
protection type IP65, protection class I, impact resistance IK08,
windage area 0,03 m², dimensions (L×H×W):
153 × 199 × 118 mm, weight 2.8 kg

The modular luminaire design makes the replacement of
components possible. The product meets the demands of the
applicable EU guidelines and product safety regulations and
bears the CE mark.

 IP65 IK08

Specification

Wattage	36 W	Beam angle (FWHM)	up58° / down 138°
Delivered lumens	86 lm/W	Housing colour	black RAL 7021
Light source	LED 4000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Colour tolerance	max 3 SDCM	Impact resistance	IK08
Lifetime ta 25° C	L80/B20 > 50.000 h	Windage area	0,03m²
Control gear	DALI	Dimensions	153 × 199 × 118 mm
Input voltage AC	220 – 240 V	Weight	2,80 kg
Input voltage DC	220 – 240 V	Max. ambient temperature ta	35°
Voltage protection	2 kV L/N 4 kV L/PE		
Luminaires per B16A / C16A	50 / 85		