

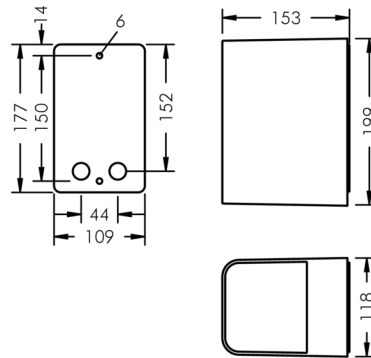





### Highrise

8 365 546 199

2 × 18 W, 3087 lm, 3000 K warm white, DALI,  
wide beam up, asymmetrical beam down  
up58° / down 60°

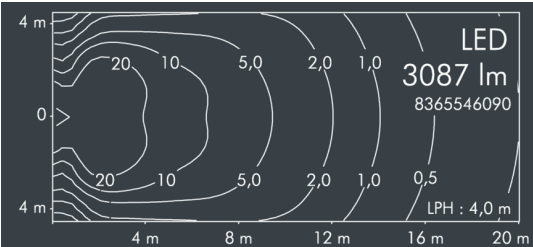

### Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, wall box with 2 stainless steel screws, wall box: 2 drilled holes Ø 6 mm, spacing 150 mm, cable gland: 2x Ø 7-10 mm, connecting terminal: 5 pole, highly efficient aluminum reflector, integral driver (DALI), CRI > 80, max 3 SDCM, service life L80/B20 > 50.000 h, Beam angle (FWHM): up58°, Main beam angle: down 60°, luminous flux: 3087 lm, wattage: 36 W, delivered lumens 86 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,03 m², dimensions (L×H×W): 153 × 199 × 118 mm, weight 2.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK08

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

### Specification

|                            |                      |                             |                    |
|----------------------------|----------------------|-----------------------------|--------------------|
| Wattage                    | 36 W                 | Beam angle (FWHM)           | up58°              |
| Delivered lumens           | 86 lm/W              | Main beam angle             | down 60°           |
| Light source               | LED 3000 K           | Housing colour              | black RAL 7021     |
| Color Rendering Index      | CRI > 80             | Protection type             | IP65               |
| Colour tolerance           | max 3 SDCM           | Protection class            | I                  |
| Lifetime ta 25° C          | L80/B20 > 50.000 h   | Impact resistance           | IK08               |
| Control gear               | DALI                 | Windage area                | 0,03m²             |
| Input voltage AC           | 220 – 240 V          | Dimensions                  | 153 × 199 × 118 mm |
| Input voltage DC           | 220 – 240 V          | Weight                      | 2,80 kg            |
| Voltage protection         | 2 kV L/N   4 kV L/PE | Max. ambient temperature ta | 35°                |
| Luminaires per B16A / C16A | 50 / 85              |                             |                    |