

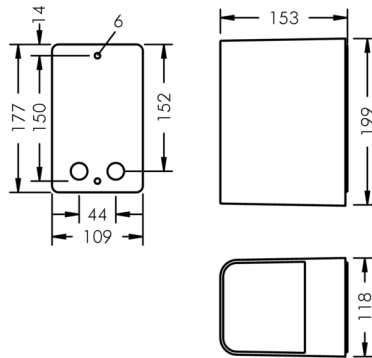





Highrise

8 365 656 189

2 × 16 W, 1956 lm, 3000 K warm white, DALI,
accent light up, lateral wide beam down
up 1° / down 138°

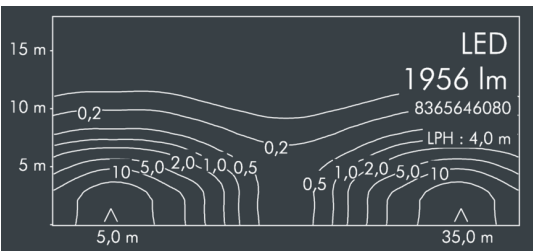

Customized solutions and modifications are possible: Special RAL,
DB or NCS colours as polyester powder coat, luminaires in
2700 K and other colour temperatures and versions for high
ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12,
polyester powder coated by high-quality and UV-stabilized
coating process, Colour: silver grey, all exterior parts are
stainless steel, tempered high efficiency safety glass, anti-reflective
coating from 1 side, dark screenprint, silicon gasket, wall box
with 2 stainless steel screws, wall box: 2 drilled holes Ø 6 mm,
spacing 150 mm, cable gland: 2x Ø 7-10 mm,
connecting terminal: 5 pole, projection lens, lens made of optical
silicon, integral driver (DALI), CRI > 80, max 3 SDCM,
service life L80/B20 > 50.000 h,
Beam angle (FWHM): up 1° / down 138°, luminous flux:
1956 lm, wattage: 32 W, delivered lumens 61 lm/W,
protection type IP65, protection class I, impact resistance IK08,
windage area 0,03 m², dimensions (L×H×W):
153 × 199 × 118 mm, weight 2.8 kg

The modular luminaire design makes the replacement of
components possible. The product meets the demands of the
applicable EU guidelines and product safety regulations and
bears the CE mark.

 IP65 IK08

Specification

Wattage	32 W	Beam angle (FWHM)	up 1° / down 138°
Delivered lumens	61 lm/W	Housing colour	silver grey
Light source	LED 3000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Colour tolerance	max 3 SDCM	Impact resistance	IK08
Lifetime ta 25° C	L80/B20 > 50.000 h	Windage area	0,03m²
Control gear	DALI	Dimensions	153 × 199 × 118 mm
Input voltage AC	220 – 240 V	Weight	2,80 kg
Input voltage DC	220 – 240 V	Max. ambient temperature ta	35°
Voltage protection	2 kV L/N 4 kV L/PE		
Luminaires per B16A / C16A	50 / 85		