

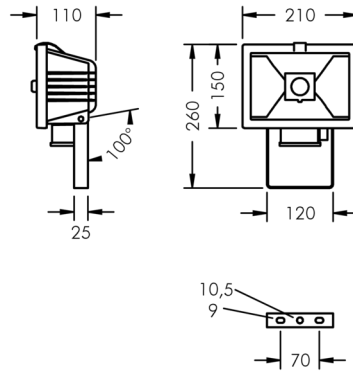





## LED-floodlights Mini

8 540 095 059

41 W, 4255 lm, 4000 K neutral white,  
wide beam 56° / 72°

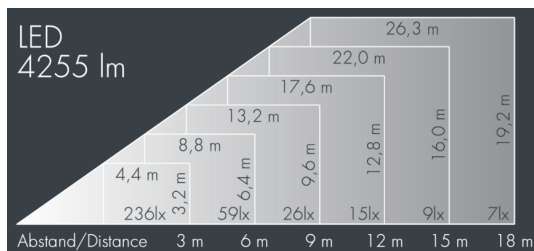

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: unpainted, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, 1 stainless steel release fastener, stainless steel mounting bracket: 2 holes Ø 9 mm, spacing 70 mm, 1 centre hole Ø 10.5 mm, tilt range: 100°, cable gland: PG 11, connecting terminal: 3 pole, axially symmetrical highgloss reflector, integral control gear, CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 56° / 72°, luminous flux: 4255 lm, wattage: 41 W, delivered lumens 104 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,04 m², dimensions (L×H×W): 210 × 110 × 150 mm, weight 1.7 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



IP 65 IK 08

## Specification

|                       |                    |                             |                    |
|-----------------------|--------------------|-----------------------------|--------------------|
| Wattage               | 41 W               | Beam angle (FWHM)           | 56° / 72°          |
| Delivered lumens      | 104 lm/W           | Housing colour              | unpainted          |
| Light source          | LED 4000 K         | Power supply cable          | Ø 5 – 13 mm        |
| Color Rendering Index | CRI > 80           | Protection type             | IP65               |
| Colour tolerance      | max 2 SDCM         | Protection class            | I                  |
| Lifetime ta 25° C     | L90/B10 > 50.000 h | Impact resistance           | IK08               |
| Control gear          | on / off           | Windage area                | 0,04m²             |
| Input voltage AC      | 120 – 277 V        | Dimensions                  | 210 × 110 × 150 mm |
|                       |                    | Weight                      | 1,70 kg            |
|                       |                    | Max. ambient temperature ta | 35°                |