



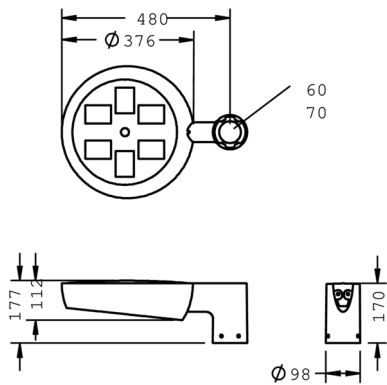

Metaspac

8 215 366 599  
6 × 8,6 W, 7204 lm, 3000 K warm white, Zhaga 18 -  
up / down,  
Street Optic 36° / 155°

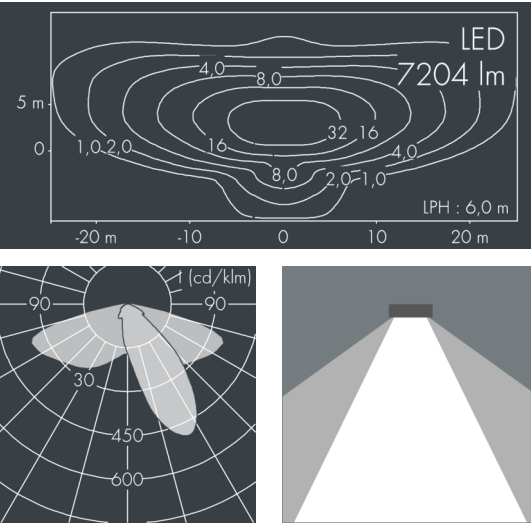

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 5 stainless steel screws, with pole top fitter for 1 luminaire for poles Ø 60/76 mm, fastening with 4 set screws M8, cable gland: M20, PMMA Linsen, integral driver (AC/DC), CRI > 80, Beam angle (FWHM): 36° / 155°, luminous flux: 7204 lm, wattage: 53 W, delivered lumens 137 lm/W, protection type IP65, protection class I, impact resistance IK08, dimensions: Ø 376 mm, width 112 mm, weight 5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

Ⓢ IP65 IK08

Specification

|                       |                         |                   |                        |
|-----------------------|-------------------------|-------------------|------------------------|
| Wattage               | 53 W                    | Beam angle (FWHM) | 36° / 155°             |
| Delivered lumens      | 137 lm/W                | Housing colour    | white RAL 9002         |
| Light source          | LED 3000 K              | Protection type   | IP65                   |
| Color Rendering Index | CRI > 80                | Protection class  | I                      |
| Control gear          | Zhaga 18 - oben / unten | Impact resistance | IK08                   |
|                       |                         | Dimensions        | Ø 376 mm, width 112 mm |
|                       |                         | Weight            | 5,00 kg                |