



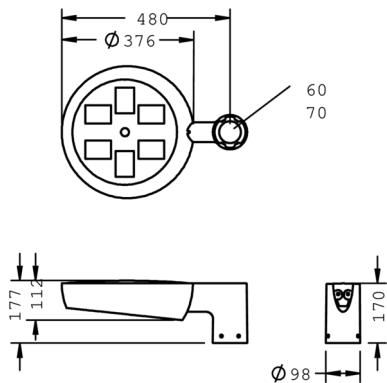

Metaspac

8 215 367 399
6 × 8,6 W, 6985 lm, 2700 K warm white, Zhaga 18 -
up,
Street Optic 36° / 155°

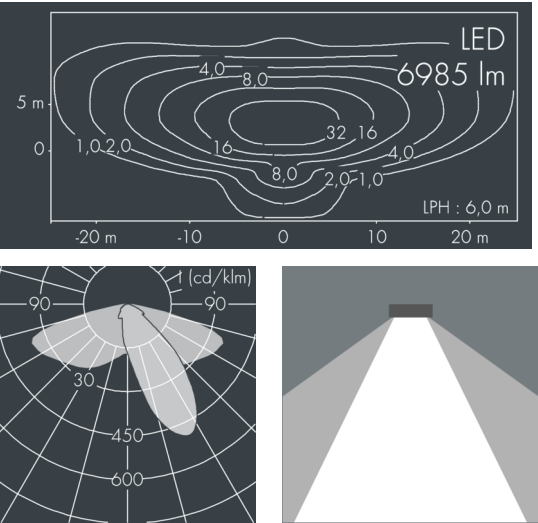

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 5 stainless steel screws, with pole top fitter for 1 luminaire for poles Ø 60/76 mm, fastening with 4 set screws M8, cable gland: M20, PMMA Linsen, integral driver (AC/DC), CRI > 80, Beam angle (FWHM): 36° / 155°, luminous flux: 6985 lm, wattage: 53 W, delivered lumens 133 lm/W, protection type IP65, protection class I, impact resistance IK08, dimensions: Ø 376 mm, width 112 mm, weight 5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

Ⓢ IP65 IK08

Specification

Wattage	53 W	Beam angle (FWHM)	36° / 155°
Delivered lumens	133 lm/W	Housing colour	white RAL 9002
Light source	LED 2700 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Control gear	Zhaga 18 - oben	Impact resistance	IK08
		Dimensions	Ø 376 mm, width 112 mm
		Weight	5,00 kg