

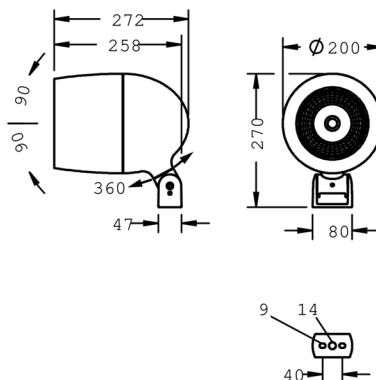


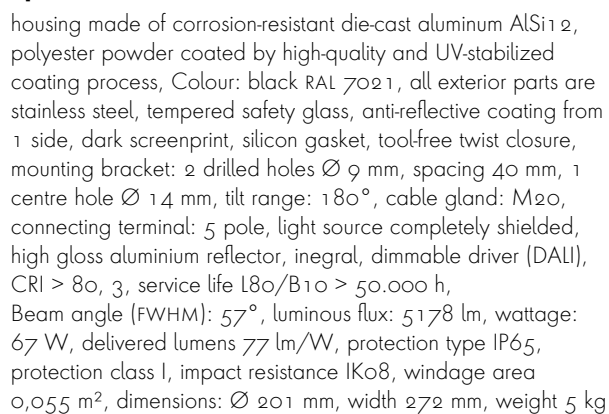

67 W, 5178 lm, 2700 K warm white, DALI,
wide beam 57°



IP 65 IK 08

Specification

Wattage	67 W	Beam angle (FWHM)	57°
Delivered lumens	77 lm/W	Housing colour	black RAL 7021
Light source	LED 2700 K	Power supply cable	Ø 6 – 11 mm
Color Rendering Index	CRI > 80	Protection type	IP65
Colour tolerance	3	Protection class	I
Lifetime ta 25° C	L80/B10 > 50.000 h	Impact resistance	IK08
Control gear	DALI	Windage area	0,055m²
Input voltage AC	220 – 240 V	Dimensions	Ø 201 mm, width 272 mm
Input voltage DC	220 – 240 V	Weight	5,00 kg
Voltage protection	2 kV L/N 4 kV L/PE	Max. ambient temperature ta	35°
Luminaires per B16A / C16A	10 / 16		