

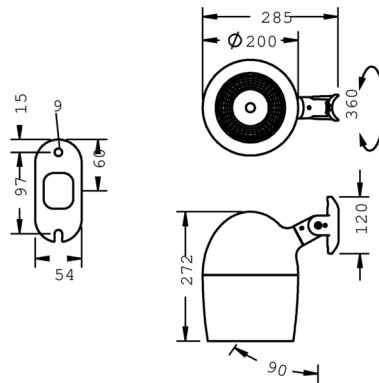


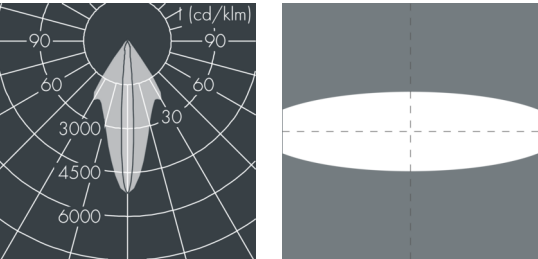

Metaspot 3

8 243 257 039  
67 W, 4644 lm, 2700 K warm white,  
linear, horizontal 9° / 36°

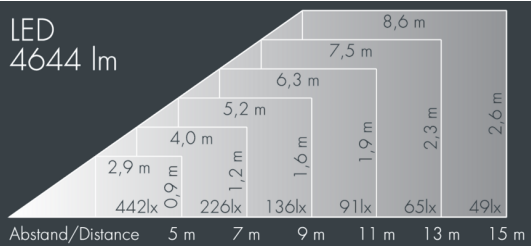

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey , all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, tool-free twist closure, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 40 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 3 pole, light source completely shielded, high gloss aluminium reflector, integral driver (AC/DC), CRI > 80, 3, service life L80/B10 > 50.000 h, Beam angle (FWHM): 9° / 36°, luminous flux: 4644 lm, wattage: 67 W, delivered lumens 69 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,055 m², dimensions: Ø 201 mm, width 272 mm, weight 5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

Ⓢ IP65 IK08

Specification

|                            |                      |                             |                        |
|----------------------------|----------------------|-----------------------------|------------------------|
| Wattage                    | 67 W                 | Beam angle (FWHM)           | 9° / 36°               |
| Delivered lumens           | 69 lm/W              | Housing colour              | silver grey            |
| Light source               | LED 2700 K           | Power supply cable          | Ø 6 – 11 mm            |
| Color Rendering Index      | CRI > 80             | Protection type             | IP65                   |
| Colour tolerance           | 3                    | Protection class            | I                      |
| Lifetime ta 25° C          | L80/B10 > 50.000 h   | Impact resistance           | IK08                   |
| Control gear               | on / off             | Windage area                | 0,055m²                |
| Input voltage AC           | 220 – 240 V          | Dimensions                  | Ø 201 mm, width 272 mm |
| Input voltage DC           | 220 – 240 V          | Weight                      | 5,00 kg                |
| Voltage protection         | 2 kV L/N   4 kV L/PE | Max. ambient temperature ta | 35°                    |
| Luminaires per B16A / C16A | 10 / 16              |                             |                        |