

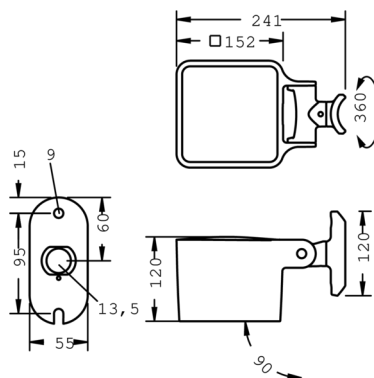




8 264 266 059

| Abstand/Distance  | 4 m    | 8 m    | 12 m   | 16 m    | 20 m    |
|-------------------|--------|--------|--------|---------|---------|
| Beam Diameter     | 3,25 m | 6,50 m | 9,75 m | 12,99 m | 16,24 m |
| Light Points (lx) | 189lx  | 47lx   | 21lx   | 12lx    | 8lx     |



## Specification

housing made of corrosion-resistant die-cast aluminum AlSi1 2, powder coating coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 3 pole, precise PMMA optics, integral driver (AC/DC), CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 44°, luminous flux: 2528 lm, wattage: 37 W, delivered lumens 68 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,022 m², dimensions (L×H×W): 152 × 120 × 152 mm, weight 2.4 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



IP65 IK08

|                            |                      |                             |                    |
|----------------------------|----------------------|-----------------------------|--------------------|
| Wattage                    | 37 W                 | Beam angle (FWHM)           | 44°                |
| Delivered lumens           | 68 lm/W              | Housing colour              | white RAL 9002     |
| Light source               | LED 3000 K           | Power supply cable          | Ø 6 – 13 mm        |
| Color Rendering Index      | CRI > 80             | Protection type             | IP65               |
| Colour tolerance           | max 2 SDCM           | Protection class            | I                  |
| Lifetime ta 25° C          | L90/B10 > 50.000 h   | Impact resistance           | IK08               |
| Control gear               | on / off             | Windage area                | 0,022m²            |
| Input voltage AC           | 220 – 240 V          | Dimensions                  | 152 × 120 × 152 mm |
| Input voltage DC           | 220 – 240 V          | Weight                      | 2,40 kg            |
| Voltage protection         | 4 kV L/N   2 kV L/PE | Max. ambient temperature ta | 35°                |
| Luminaires per B16A / C16A | 23 / 39              |                             |                    |