

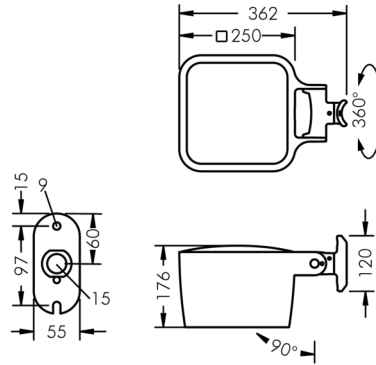





**MonoFlood 4**

8 204 269 049  
110 W, 2751 lm, RGBW (3000 K) DMX,  
medium wide beam 35°

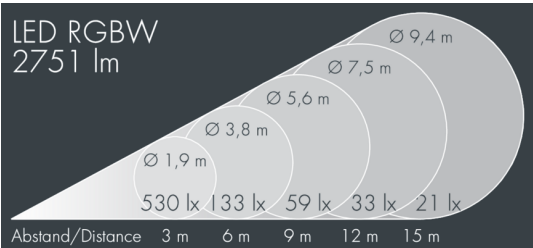

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

**Specification text**

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 6 pole, precise PMMA optics, integral driver (AC/DC), service life L80/B20 > 50.000 h, Beam angle (FWHM): 35°, luminous flux: 2751 lm, wattage: 110 W, delivered lumens 25 lm/W, protection type IP67, protection class I, impact resistance IK10, windage area 0,048 m², dimensions (L×H×W): 250 × 176 × 250 mm, weight 7.2 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.

  IP 67 IK 10

**Specification**

|                            |                      |                             |                    |
|----------------------------|----------------------|-----------------------------|--------------------|
| Wattage                    | 110 W                | Beam angle (FWHM)           | 35°                |
| Delivered lumens           | 25 lm/W              | Housing colour              | white RAL 9002     |
| Light source               | LED RGBW (3000 K)    | Protection type             | IP67               |
| Lifetime ta 25° C          | L80/B20 > 50.000 h   | Protection class            | I                  |
| Control gear               | DMX                  | Impact resistance           | IK10               |
| Input voltage AC           | 134 – 250 V          | Windage area                | 0,048m²            |
| Input voltage DC           | 135 – 250 V          | Dimensions                  | 250 × 176 × 250 mm |
| Voltage protection         | 3 kV L/N   4 kV L/PE | Weight                      | 7,20 kg            |
| Luminaires per B16A / C16A | 8 / 13               | Max. ambient temperature ta | 30°                |