




Monospace

8 252 456 109  
2 × 55 W, 7942 lm, 3000 K warm white, DALI,  
Comfort Optic 71° / 139°

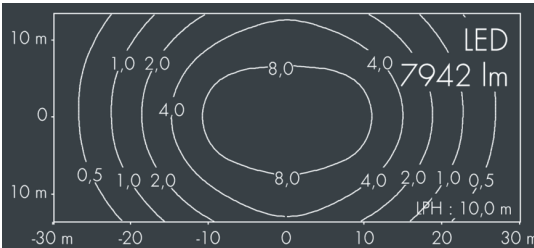

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, with pole top fitter for 2 luminaires for poles Ø 60/76 mm, 3 M8 grub screws, tilt range: 7°, cable gland: M20, with 2x 8 m cable Ho5RN-F5G1, connecting terminal: 5 pole, micro-prism optic directs light under defined angles and achieves, together with shielded LEDs, perfect glare control, integral driver (DALI), CRI > 80, 3 SCDM, service life L80/B20 > 50.000 h, Beam angle (FWHM): 71° / 139°, luminous flux: 7942 lm, wattage: 110 W, delivered lumens 72 lm/W, protection type IP67, protection class II, impact resistance IK08, windage area 0,063 m², dimensions (L×H×W): 924 × 67 × 308 mm, weight 9.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



Specification

|                       |                    |                             |                   |
|-----------------------|--------------------|-----------------------------|-------------------|
| Wattage               | 110 W              | Beam angle (FWHM)           | 71° / 139°        |
| Delivered lumens      | 72 lm/W            | Housing colour              | silver grey       |
| Light source          | LED 3000 K         | Power supply cable          | Ø 5 – 14 mm       |
| Color Rendering Index | CRI > 80           | Protection type             | IP67              |
| Colour tolerance      | 3 SCDM             | Protection class            | II                |
| Lifetime ta 25° C     | L80/B20 > 50.000 h | Impact resistance           | IK08              |
| Control gear          | DALI               | Windage area                | 0,063m²           |
|                       |                    | Dimensions                  | 924 × 67 × 308 mm |
|                       |                    | Weight                      | 9,80 kg           |
|                       |                    | Max. ambient temperature ta | 35°               |