

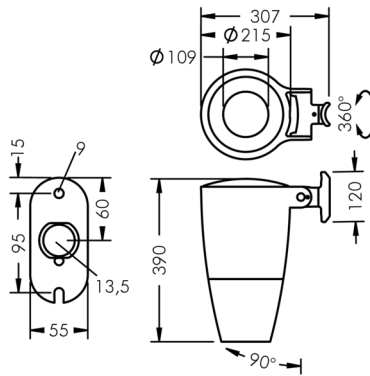





Monospot Gobo

8 905 254 149
55 W, 1680 lm, 6500 K cold white, DALI,
85 mm focal length 22°

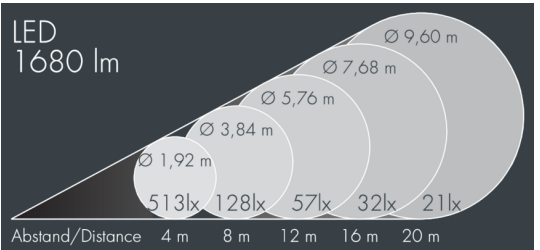

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 5 pole, focusable projection lens for precise light control and sharp-edged image projections, integral driver (DALI), CRI > 70, Beam angle (FWHM): 22°, luminous flux: 1680 lm, wattage: 55 W, delivered lumens 31 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,076 m², dimensions: Ø 215 mm, width 390 mm, weight 8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK08

Specification

Wattage	55 W
Delivered lumens	31 lm/W
Light source	LED 6500 K
Color Rendering Index	CRI > 70
Control gear	DALI
Input voltage AC	220 – 240 V
Input voltage DC	220 – 240 V
Voltage protection	2 kV L/N 4 kV L/PE
Luminaires per B16A / C16A	23 / 39

Beam angle (FWHM)	22°
Housing colour	silver grey
Power supply cable	Ø 6 – 13 mm
Protection type	IP65
Protection class	I
Impact resistance	IK08
Windage area	0,076m²
Dimensions	Ø 215 mm, width 390 mm
Weight	8,00 kg
Max. ambient temperature ta	35°