

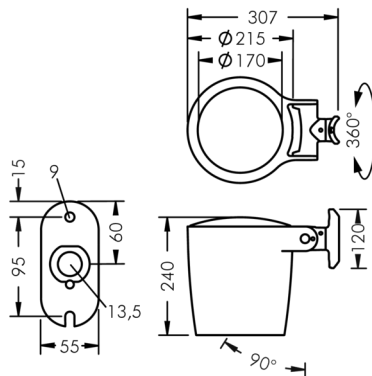





Monospot 4

8 904 242 149  
46 W, 2786 lm, 2700 K – 6500 K tunable white, DALI,  
medium wide beam 36°

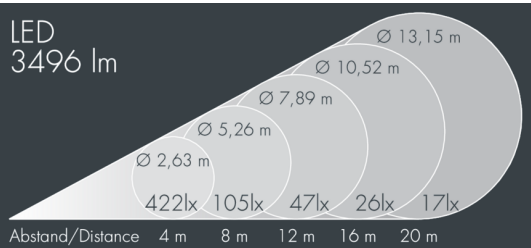

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification

|                       |                     |
|-----------------------|---------------------|
| Wattage               | 46 W                |
| Delivered lumens      | 61 – 76 lm/W        |
| Light source          | LED 2700 K – 6500 K |
| Color Rendering Index | CRI > 80            |
| Control gear          | DALI                |

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, Colour: black RAL 7021, dark screenprint, silicon gasket, closure with 3 stainless steel screws, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 5 pole, highly efficient faceted rotationally symmetrical reflector, integral, dimmable driver (DALI), CRI > 80, Beam angle (FWHM): 36°, luminous flux: 2786 lm, wattage: 46 W, delivered lumens 61 – 76 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,075 m², weight 5.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP67 IK08