




Monospot 2

8 906 255 179
15 W, 1090 lm, 4000 K neutral white, DALI,
linear, rotatable 35° / 8°

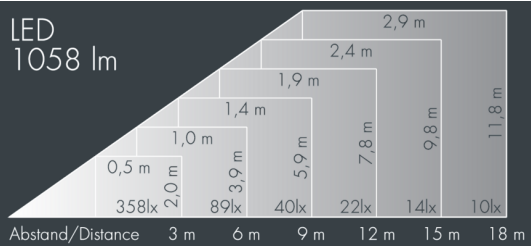

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey , all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 2 stainless steel screws, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M16, connecting terminal: 5 pole, highly efficient faceted rotationally symmetrical reflector, integral, dimmable driver (DALI), CRI > 80, max 3 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 35° / 8°, luminous flux: 1090 lm, wattage: 15 W, delivered lumens 73 lm/W, protection type IP67, protection class II, impact resistance IK08, windage area 0,031 m², dimensions: Ø 133 mm, width 153 mm, weight 1.9 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



Specification

Wattage	15 W
Delivered lumens	73 lm/W
Light source	LED 4000 K
Color Rendering Index	CRI > 80
Colour tolerance	max 3 SDCM
Lifetime ta 25° C	L90/B10 > 50.000 h
Control gear	DALI
Input voltage AC	110 – 240 V
Input voltage DC	195 – 240 V
Voltage protection	2 kV L/N 2 kV L/PE
Luminaires per B16A / C16A	50 / 85

Beam angle (FWHM)	35° / 8°
Housing colour	silver grey
Power supply cable	Ø 5 – 9 mm
Protection type	IP67
Protection class	II
Impact resistance	IK08
Windage area	0,031 m²
Dimensions	Ø 133 mm, width 153 mm
Weight	1,90 kg
Max. ambient temperature ta	45°