


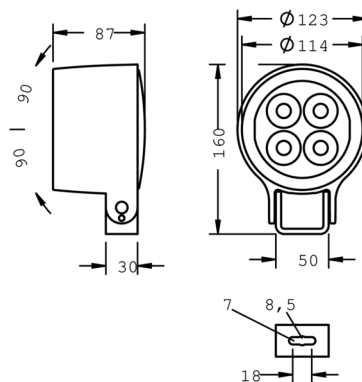



8 992 055 059

LED  
588 lm

Ø 11,59 m  
Ø 9,28 m  
Ø 6,96 m  
Ø 4,64 m  
Ø 2,32 m

113lx 28lx 13lx 7lx 5lx

Abstand/Distance 2 m 4 m 6 m 8 m 10 m



### Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 2 stainless steel screws, mounting bracket: 1 elongated hole Ø 7 mm, spacing 18 mm, 1 centre hole Ø 8.5 mm, tilt range: 180°, cable gland: M16, connecting terminal: 3 pole, precise PMMA optics, integral driver (AC/DC), CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 60°, luminous flux: 588 lm, wattage: 10 W, delivered lumens 59 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,012 m², dimensions: Ø 123 mm, width 87 mm, weight 1.2 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



IP 67 IK 08

## Specification

|                            |                      |                             |                       |
|----------------------------|----------------------|-----------------------------|-----------------------|
| Wattage                    | 10 W                 | Beam angle (FWHM)           | 60°                   |
| Delivered lumens           | 59 lm/W              | Housing colour              | silver grey           |
| Light source               | LED 4000 K           | Power supply cable          | Ø 5 – 9 mm            |
| Color Rendering Index      | CRI > 80             | Protection type             | IP67                  |
| Colour tolerance           | max 2 SDCM           | Protection class            | I                     |
| Lifetime ta 25° C          | L90/B10 > 50.000 h   | Impact resistance           | IK08                  |
| Control gear               | on / off             | Windage area                | 0,012m²               |
| Input voltage AC           | 220 – 240 V          | Dimensions                  | Ø 123 mm, width 87 mm |
| Input voltage DC           | 220 – 240 V          | Weight                      | 1,20 kg               |
| Voltage protection         | 2 kV L/N   4 kV L/PE | Max. ambient temperature ta | 45°                   |
| Luminaires per B16A / C16A | 50 / 50              |                             |                       |