

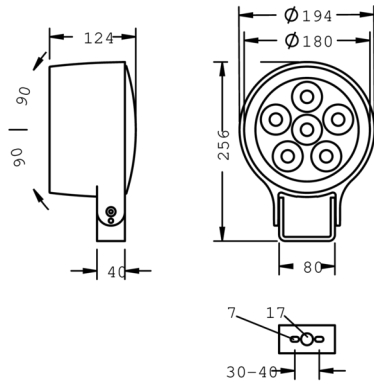





Monospot S4

8 994 049 019
48 W, 1709 lm, RGBW (3000 K) DMX,
narrow beam 13°

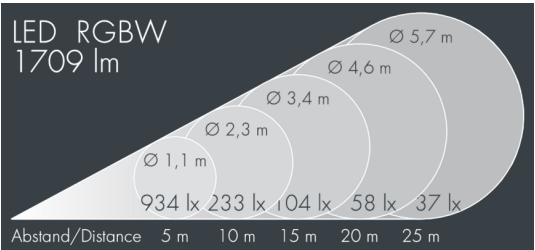

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, mounting bracket: 2 drilled holes Ø 7 mm, spacing 30-40 mm, 1 centre hole Ø 17 mm, tilt range: 180°, cable gland: 2 x M20, connecting terminal: 6 pole, precise PMMA optics, integral driver (AC/DC), service life L70/B20 > 50.000 h, Beam angle (FWHM): 13°, luminous flux: 1709 lm, wattage: 48 W, delivered lumens 36 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,025 m², dimensions: Ø 194 mm, width 124 mm, weight 2.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



IP 67 IK 08

Specification

Wattage	48 W
Delivered lumens	36 lm/W
Light source	LED RGBW (3000 K)
Lifetime ta 25° C	L70/B20 > 50.000 h
Control gear	DMX
Input voltage AC	220 – 240 V
Input voltage DC	220 – 240 V
Voltage protection	2 kV L/N 2 kV L/PE
Luminaires per B16A / C16A	38 / 38

Beam angle (FWHM)	13°
Housing colour	black RAL 7021
Power supply cable	Ø 6 – 9 mm
Protection type	IP67
Protection class	I
Impact resistance	IK08
Windage area	0,025m²
Dimensions	Ø 194 mm, width 124 mm
Weight	2,80 kg
Max. ambient temperature ta	35°