

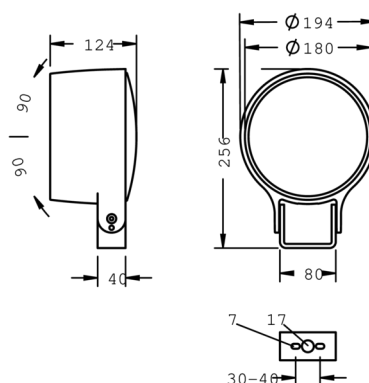





8 994 056 159

Abstand / Distance	3 m	6 m	9 m	12 m	15 m
Beam Diameter (Ø)	5,1 m	10,3 m	15,4 m	20,6 m	25,7 m
Illuminance (lx)	143 lx	36 lx	16 lx	9 lx	6 lx



Specification

housing made of corrosion-resistant die-cast aluminum AlSi 12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey , all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, mounting bracket: 2 drilled holes Ø 7 mm, spacing 30-40 mm, 1 centre hole Ø 17 mm, tilt range: 180°, cable gland: M20, connecting terminal: 5 pole, highly efficient faceted rotationally symmetrical reflector, integral, dimmable driver (DALI), CRI > 80, luminous flux: 3770 lm, wattage: 45 W, delivered lumens 83 lm/W, protection type IP67, protection class I, impact resistance IK08, dimensions:
Ø 194 mm, width 124 mm, weight 3 kg



IP 67 IK 08

Wattage	45 W	Housing colour	silver grey
Delivered lumens	83 lm/W	Protection type	IP67
Light source	LED 3000 K	Protection class	I
Color Rendering Index	CRI > 80	Impact resistance	IK08
Control gear	DALI	Dimensions	Ø 194 mm, width 124 mm
		Weight	3,00 kg