

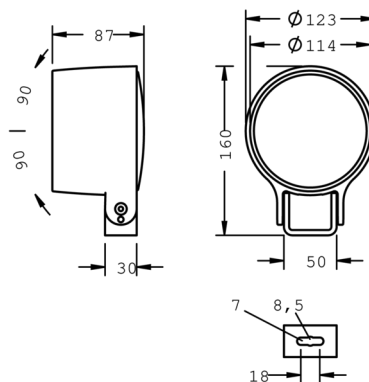




8 992 056 089



Specification text

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



IP 67 IK 08

Specification

Wattage	9 W	Housing colour	silver grey
Delivered lumens	75 lm/W	Power supply cable	Ø 5 – 9 mm
Light source	LED 3000 K	Protection type	IP67
Color Rendering Index	CRI > 70	Protection class	I
Colour tolerance	max 2 SDCM	Impact resistance	IK08
Lifetime ta 25° C	L90/B10 > 50.000 h	Windage area	0,012m²
Control gear	on / off	Dimensions	Ø 123 mm, width 87 mm
Input voltage AC	220 – 240 V	Weight	1,20 kg
Input voltage DC	220 – 240 V	Max. ambient temperature ta	45°
Voltage protection	2 kV L/N 4 kV L/PE		
Luminaires per B16A / C16A	50 / 50		