

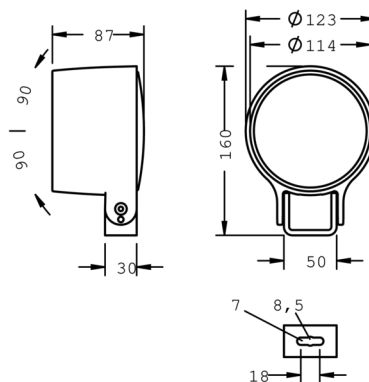




8 992 066 089

Diagram illustrating the beam spread and dimensions of the LED 679 lm lighting fixture. The fixture is shown at a height of 4.0 m (21PH). The beam spread is indicated by the 1.0 and 2.0 degree angles. The dimensions of the beam spread are 10.0 m (width) and 8.0 m (height).



Specification

housing made of corrosion-resistant die-cast aluminum AlSi 12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 2 stainless steel screws, mounting bracket: 1 elongated hole Ø 7 mm, spacing 18 mm, 1 centre hole Ø 8.5 mm, tilt range: 180°, cable gland: M16, connecting terminal: 3 pole, precise PMMA optics, integral driver (AC/DC), CRI > 70, max 2 SDCM, service life L90/B10 > 50.000 h, luminous flux: 679 lm, wattage: 9 W, delivered lumens 75 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,012 m², dimensions: Ø 123 mm, width 87 mm, weight 1.2 kg



IP 67 IK 08

Wattage	9 W	Housing colour	white RAL 9002
Delivered lumens	75 lm/W	Power supply cable	Ø 5 – 9 mm
Light source	LED 3000 K	Protection type	IP67
Color Rendering Index	CRI > 70	Protection class	I
Colour tolerance	max 2 SDCM	Impact resistance	IK08
Lifetime ta 25° C	L90/B10 > 50.000 h	Windage area	0,012m²
Control gear	on / off	Dimensions	Ø 123 mm, width 87 mm
Input voltage AC	220 – 240 V	Weight	1,20 kg
Input voltage DC	220 – 240 V	Max. ambient temperature ta	45°
Voltage protection	2 kV L/N 4 kV L/PE		
Luminaires per B16A / C16A	50 / 50		