

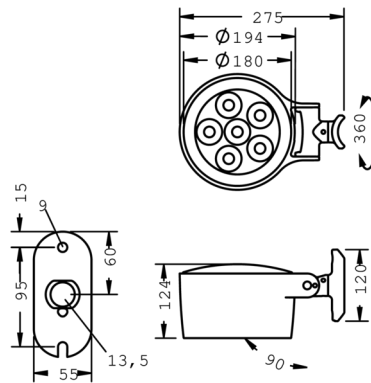





Monospot S4

8 994 255 079
6 × 7,7 W, 2315 lm, 4000 K neutral white,
linear, rotatable 5° / 24°

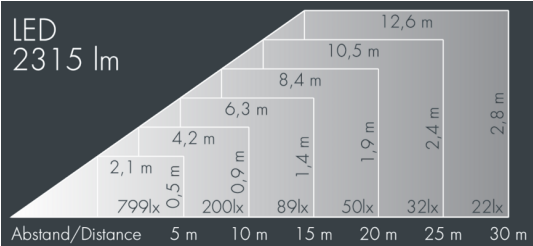

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey , all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 3 stainless steel screws, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 3 pole, precise PMMA optics, integral driver (AC/DC), CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 5° / 24°, luminous flux: 2315 lm, wattage: 46 W, delivered lumens 50 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,027 m², dimensions: Ø 194 mm, width 124 mm, weight 2.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



Specification

Wattage	46 W
Delivered lumens	50 lm/W
Light source	LED 4000 K
Color Rendering Index	CRI > 80
Colour tolerance	max 2 SDCM
Lifetime ta 25° C	L90/B10 > 50.000 h
Control gear	on / off
Input voltage AC	220 – 240 V
Input voltage DC	220 – 240 V
Voltage protection	6 kV L/N 10 kV L/PE
Luminaires per B16A / C16A	8 / 9

Beam angle (FWHM)	5° / 24°
Housing colour	silver grey
Power supply cable	Ø 6 – 13 mm
Protection type	IP67
Protection class	I
Impact resistance	IK08
Windage area	0,027m²
Dimensions	Ø 194 mm, width 124 mm
Weight	2,80 kg
Max. ambient temperature ta	40°