

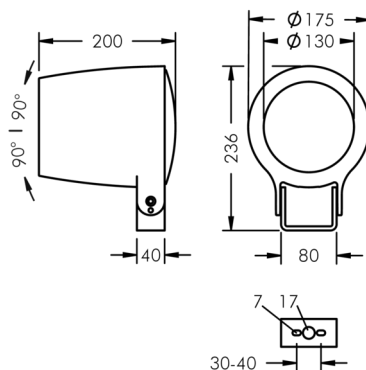





8 907 056 199

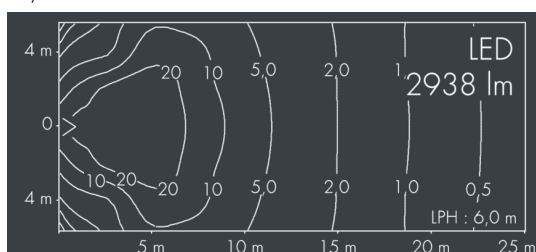

ambient temperature.

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



IP 67 IK 08

Wattage	36 W	Housing colour	silver grey RAL 9006
Delivered lumens	83 lm/W	Power supply cable	Ø 6 – 13 mm
Light source	LED 3000 K	Protection type	IP67
Color Rendering Index	CRI > 80	Protection class	II
Colour tolerance	max 2 SCDM	Impact resistance	IK08
Lifetime ta 25° C	L90/B10 > 50.000 h	Windage area	0,049m²
Control gear	DALI	Dimensions	Ø 175 mm, width 200 mm
Input voltage AC	110 – 240 V	Weight	3,50 kg
Input voltage DC	190 – 250 V	Max. ambient temperature ta	35°
Voltage protection	4 kV L/N 5 kV L/PE		
Luminaires per B16A / C16A	30 / 51		