

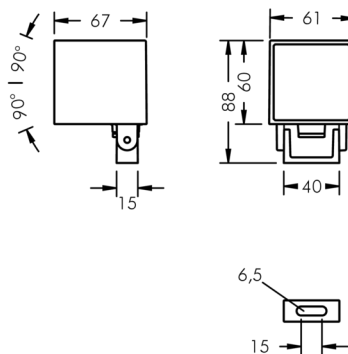





5 W, 365 lm, 4000 K neutral white,  
linear, horizontal 7° / 34°

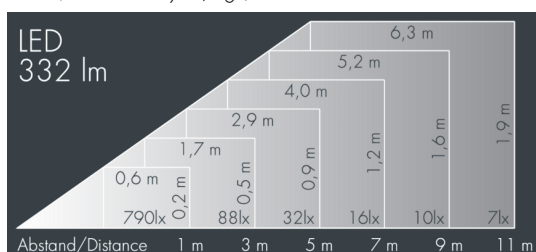

IP65 IK07

|                            |                      |                             |                 |
|----------------------------|----------------------|-----------------------------|-----------------|
| Wattage                    | 5 W                  | Beam angle (FWHM)           | 7° / 34°        |
| Delivered lumens           | 73 lm/W              | Housing colour              | silver grey     |
| Light source               | LED 4000 K           | Protection type             | IP65            |
| Color Rendering Index      | CRI > 80             | Protection class            | I               |
| Colour tolerance           | max 3 SDCM           | Impact resistance           | IK07            |
| Lifetime ta 25° C          | L90/B10 > 50.000 h   | Windage area                | 0,005m²         |
| Control gear               | on / off             | Dimensions                  | 61 × 67 × 60 mm |
| Input voltage AC           | 100 – 240 V          | Weight                      | 0,47 kg         |
| Voltage protection         | 1 kV L/N   1 kV L/PE | Max. ambient temperature ta | 45°             |
| Luminaires per B16A / C16A | 154 / 154            |                             |                 |