

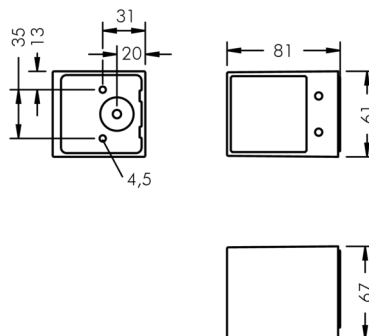




8 308 155 059



## Specification

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, housing locked with a grub screw, mounting: 2 drilled holes Ø 4.5 mm, spacing 35 mm, cable gland: cable entry for recessed cable Ø 7-10 mm, connecting terminal: 3 pole, highly efficient aluminum reflector with satin finish, integral driver (AC/DC), CRI > 80, max 3 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 66° / 64°, luminous flux: 374 lm, wattage: 5 W, delivered lumens 75 lm/W, protection type IP65, protection class I, impact resistance IK07, windage area 0,005 m², dimensions (L×H×W): 81 × 67 × 61 mm, weight 0.47 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



IP65 IK07

|                            |                      |                             |                 |
|----------------------------|----------------------|-----------------------------|-----------------|
| Wattage                    | 5 W                  | Beam angle (FWHM)           | 66° / 64°       |
| Delivered lumens           | 75 lm/W              | Housing colour              | silver grey     |
| Light source               | LED 4000 K           | Protection type             | IP65            |
| Color Rendering Index      | CRI > 80             | Protection class            | I               |
| Colour tolerance           | max 3 SDCM           | Impact resistance           | IK07            |
| Lifetime ta 25° C          | L90/B10 > 50.000 h   | Windage area                | 0,005m²         |
| Control gear               | on / off             | Dimensions                  | 81 × 67 × 61 mm |
| Input voltage AC           | 100 – 240 V          | Weight                      | 0,47 kg         |
| Voltage protection         | 1 kV L/N   1 kV L/PE | Max. ambient temperature ta | 45°             |
| Luminaires per B16A / C16A | 154 / 154            |                             |                 |