




## Nightspot A

8 965 165 059

4 × 1,5 W, 478 lm, 4000 K neutral white,  
wide beam 45°

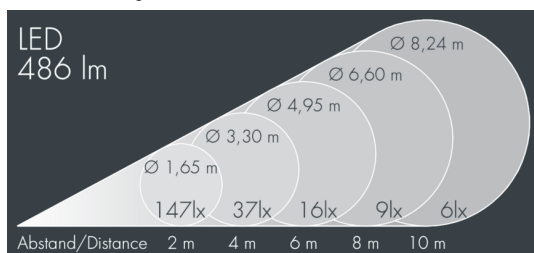

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, base can be rotated 360°, 1 drilled hole Ø 6.5 mm, tilt range: 110°, cable gland: 7-10 mm, recessed or surface mounted cable, connecting terminal: 3 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, with 0,8 m cable Ho5RN-F3G1, integral driver (AC/DC), CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 45°, luminous flux: 478 lm, wattage: 6 W, delivered lumens 80 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,015 m², dimensions: Ø 110 mm, width 182 mm, weight 1.2 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



IP65 IK08

## Specification

|                            |                      |                             |                        |
|----------------------------|----------------------|-----------------------------|------------------------|
| Wattage                    | 6 W                  | Beam angle (FWHM)           | 45°                    |
| Delivered lumens           | 80 lm/W              | Housing colour              | white RAL 9002         |
| Light source               | LED 4000 K           | Protection type             | IP65                   |
| Color Rendering Index      | CRI > 80             | Protection class            | I                      |
| Colour tolerance           | max 2 SDCM           | Impact resistance           | IK08                   |
| Lifetime ta 25° C          | L90/B10 > 50.000 h   | Windage area                | 0,015m²                |
| Control gear               | on / off             | Dimensions                  | Ø 110 mm, width 182 mm |
| Input voltage AC           | 100 – 240 V          | Weight                      | 1,20 kg                |
| Input voltage DC           | 135 – 340 V          | Max. ambient temperature ta | 50°                    |
| Voltage protection         | 1 kV L/N   2 kV L/PE |                             |                        |
| Luminaires per B16A / C16A | 157 / 254            |                             |                        |