

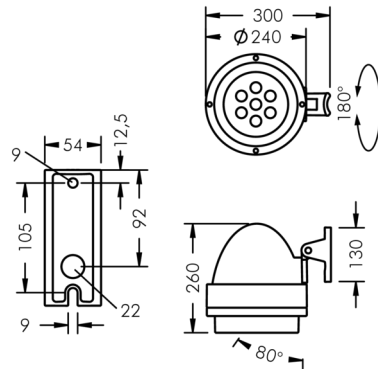




Nightspot B

8 986 259 049  
7 × 1,5 W, 926 lm, RGBW (4000 K) DMX,  
medium wide beam 30°

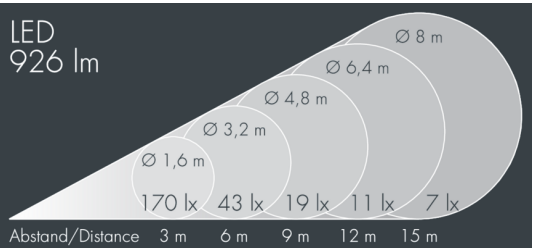

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey , all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, for installation on poles Ø 60-100mm, adjustable aluminum mounting base, powder coated: 2 drilled holes Ø 9mm, spacing 105mm, 1 centre hole Ø 22mm, tilt range: 80°, cable gland: M20, connecting terminal: 6 pole, highly efficient optics with light conductor technology for precise lighting tasks and colour mixing within the luminaire , integral driver (AC/DC), service life L70/B20 > 50.000 h, Beam angle (FWHM): 30°, luminous flux: 926 lm, wattage: 42 W, delivered lumens 22 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,05 m², dimensions: Ø 240 mm, width 260 mm, weight 5,8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP 67 IK 08

Specification

|                    |                      |
|--------------------|----------------------|
| Wattage            | 42 W                 |
| Delivered lumens   | 22 lm/W              |
| Light source       | LED RGBW (4000 K)    |
| Lifetime ta 25° C  | L70/B20 > 50.000 h   |
| Control gear       | DMX                  |
| Input voltage AC   | 120 – 250 V          |
| Input voltage DC   | 120 – 250 V          |
| Voltage protection | 1 kV L/N   2 kV L/PE |

|                             |                        |
|-----------------------------|------------------------|
| Beam angle (FWHM)           | 30°                    |
| Housing colour              | silver grey            |
| Power supply cable          | Ø 6 – 10 mm            |
| Protection type             | IP67                   |
| Protection class            | I                      |
| Impact resistance           | IK08                   |
| Windage area                | 0,05m²                 |
| Dimensions                  | Ø 240 mm, width 260 mm |
| Weight                      | 5,80 kg                |
| Max. ambient temperature ta | 45°                    |