

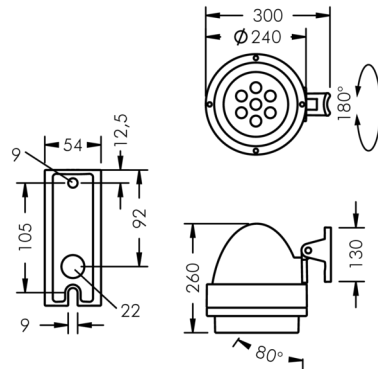




Nightspot B

8 986 269 039
7 × 1,5 W, 847 lm, RGBW (4000 K) DMX,
elliptical beam spread 24° / 47°

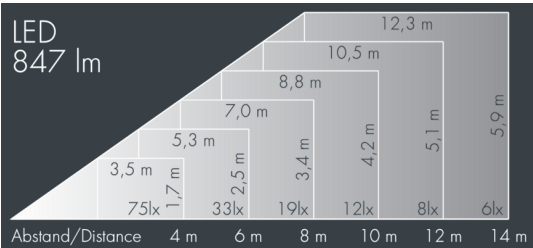

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, for installation on poles Ø 60-100mm, adjustable aluminum mounting base, powder coated: 2 drilled holes Ø 9mm, spacing 105mm, 1 centre hole Ø 22mm, tilt range: 80°, cable gland: M20, connecting terminal: 6 pole, highly efficient optics with light conductor technology for precise lighting tasks and colour mixing within the luminaire, integral driver (AC/DC), service life L70/B20 > 50.000 h, Beam angle (FWHM): 24° / 47°, luminous flux: 847 lm, wattage: 42 W, delivered lumens 20 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,05 m², dimensions: Ø 240 mm, width 260 mm, weight 5.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP 67 IK 08

Specification

Wattage	42 W
Delivered lumens	20 lm/W
Light source	LED RGBW (4000 K)
Lifetime ta 25° C	L70/B20 > 50.000 h
Control gear	DMX
Input voltage AC	120 – 250 V
Input voltage DC	120 – 250 V
Voltage protection	1 kV L/N 2 kV L/PE

Beam angle (FWHM)	24° / 47°
Housing colour	white RAL 9002
Power supply cable	Ø 6 – 10 mm
Protection type	IP67
Protection class	I
Impact resistance	IK08
Windage area	0,05m²
Dimensions	Ø 240 mm, width 260 mm
Weight	5,80 kg
Max. ambient temperature ta	45°