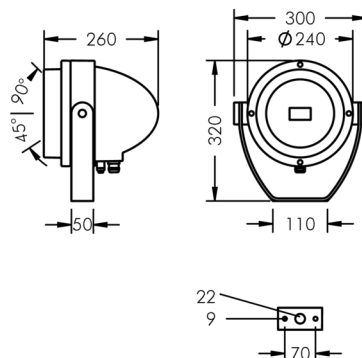


|                             |                    |
|-----------------------------|--------------------|
| Beam angle (FWHM)           | 47° / 126°         |
| Housing colour              | white RAL 9002     |
| Power supply cable          | Ø 8 – 15 mm        |
| Protection type             | IP67               |
| Protection class            | II                 |
| Impact resistance           | IK08               |
| Windage area                | 0,05m <sup>2</sup> |
| Weight                      | 5,40 kg            |
| Max. ambient temperature ta | 40°                |