



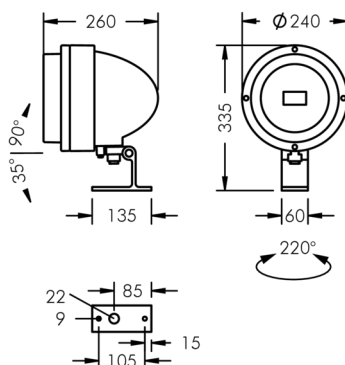

41 W, 3772 lm, 4000 K neutral white,
Street Optic 47° / 126°



Beam angle (FWHM)	47° / 126°
Housing colour	black RAL 7021
Power supply cable	Ø 8 – 15 mm
Protection type	IP67
Protection class	II
Impact resistance	IK08
Windage area	0,05m²
Weight	5,60 kg
Max. ambient temperature ta	40°