

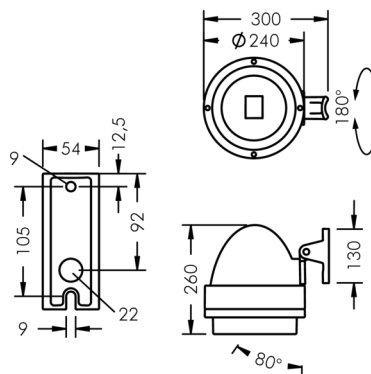




8 988 256 109

LED
3615 lm

Abstand / Distance	3 m	6 m	9 m	12 m	15 m	18 m
Beam Width (m)	7,4 m	14,9 m	22,3 m	29,7 m	37,2 m	44,6 m
Beam Height (m)	3,5 m	7,0 m	10,5 m	14,0 m	17,5 m	21,0 m
Beam Area (m²)	62lx	15lx	7lx	4lx	2lx	2lx



Specification text

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



IP 67 IK 08

Specification

Wattage	40 W	Beam angle (FWHM)	47° / 126°
Delivered lumens	91 lm/W	Housing colour	silver grey
Light source	LED 3000 K	Power supply cable	Ø 8 – 15 mm
Color Rendering Index	min. 80	Protection type	IP67
Colour tolerance	max 3 SDCM	Protection class	I
Lifetime ta 25° C	L80/B20 > 50.000 h	Impact resistance	IK08
Control gear	DALI	Windage area	0,05m²
Input voltage AC	220 – 240 V	Weight	5,30 kg
Input voltage DC	195 – 255 V	Max. ambient temperature ta	40°
Voltage protection	4 kV L/N 2 kV L/PE		
Luminaires per B16A / C16A	36 / 61		