

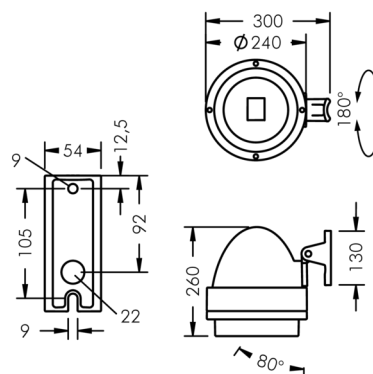




8 988 265 609

Abstand / Distance	3 m	6 m	9 m	12 m	15 m	18 m
Beam Diameter (m)	7,4 m	14,9 m	22,3 m	29,7 m	37,2 m	44,6 m
Beam Height (m)	3,5 m	7,0 m	10,5 m	14,0 m	17,5 m	21,0 m
Beam Spread (lx)	65 lx	16 lx	7 lx	4 lx	3 lx	2 lx



Specification text

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



IP 67 IK 08

Specification

Wattage	40 W	Beam angle (FWHM)	47° / 126°
Delivered lumens	95 lm/W	Housing colour	white RAL 9002
Light source	LED 4000 K	Power supply cable	Ø 8 – 15 mm
Color Rendering Index	min. 80	Protection type	IP67
Colour tolerance	max 3 SDCM	Protection class	II
Lifetime ta 25° C	l80/B20 > 50.000 h	Impact resistance	IK08
Control gear	DALI	Windage area	0,05m²
Input voltage AC	220 – 240 V	Weight	5,60 kg
Input voltage DC	195 – 255 V	Max. ambient temperature ta	40°
Voltage protection	4 kV L/N 2 kV L/PE		
Luminaires per B16A / C16A	36 / 61		