



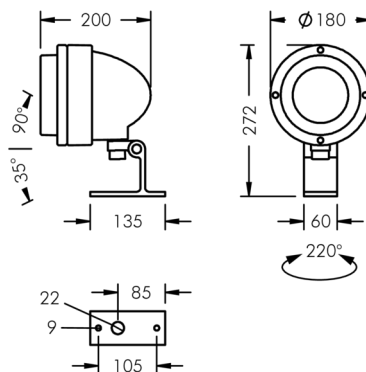

28 W, 2231 lm, 4000 K neutral white,
wide beam 53°

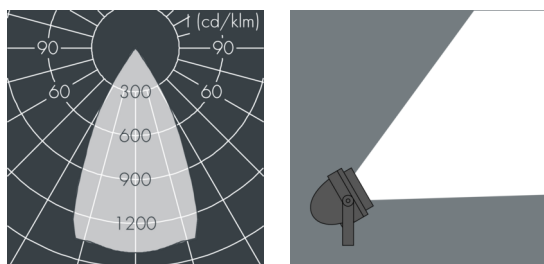

Beam angle (FWHM)	53°
Housing colour	silver grey
Power supply cable	Ø 8 – 11 mm
Protection type	IP67
Protection class	I
Impact resistance	IK08
Windage area	0,035m²
Dimensions	Ø 180 mm, width 200 mm
Weight	2,50 kg
Max. ambient temperature t _a	35°