

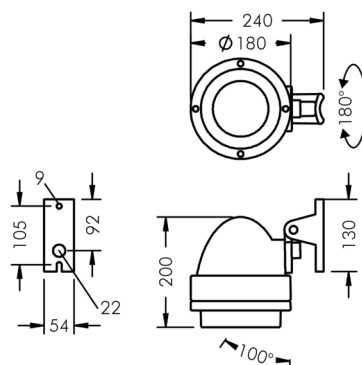




8 983 265 659

Abstand / Distance	2 m	4 m	6 m	8 m	10 m
Beam Diameter (Ø)	1,99 m	3,99 m	5,98 m	7,98 m	9,97 m
Number of LEDs (x)	558x	140x	62x	35x	22x



Specification text

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP67 IK08

Specification

Wattage	28 W	Beam angle (FWHM)	53°
Delivered lumens	81 lm/W	Housing colour	white RAL 9002
Light source	LED 4000 K	Power supply cable	Ø 8 – 11 mm
Color Rendering Index	CRI > 80	Protection type	IP67
Colour tolerance	max 2 SDCM	Protection class	II
Lifetime ta 25° C	L90/B10 > 50.000 h	Impact resistance	IK08
Control gear	DALI	Windage area	0,035m²
		Dimensions	Ø 180 mm, width 200 mm
		Weight	2,70 kg
		Max. ambient temperature ta	35°