

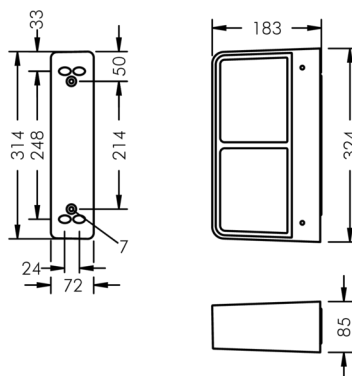




8 364 145 089

A contour plot showing the light distribution of the LED 3381 lm. The plot is set within a rectangular frame with a width of 20.0 m and a height of 15 m. The vertical axis is labeled with 5 m, 10 m, and 15 m. The horizontal axis is labeled with 20.0 m. The plot features several concentric contour lines representing different light levels. The contours are labeled with values: 1.0, 2.0, 4.0, 8.0, 16, and 33.81. The highest value, 33.81, is located at the top right corner, near the label 'LED 3381 lm'. The contours are more densely packed on the right side, indicating a higher light level in that direction. A label 'LPH : 6,0 m' is also present on the right side of the plot.



Specification text

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP 65 IK 08

Specification

Wattage	36 W	Beam angle (FWHM)	62° / 142°
Delivered lumens	94 lm/W	Housing colour	black RAL 7021
Light source	LED 4000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Colour tolerance	max 3 SDCM	Impact resistance	IK08
Lifetime ta 25° C	L80/B20 > 50.000 h	Windage area	0,057m²
Control gear	on / off	Dimensions	324 × 85 × 183 mm
Input voltage AC	220 – 240 V	Weight	3,30 kg
Input voltage DC	220 – 240 V	Max. ambient temperature ta	35°
Voltage protection	2 kV L/N 4 kV L/PE		
Luminaires per B16A / C16A	50 / 85		