

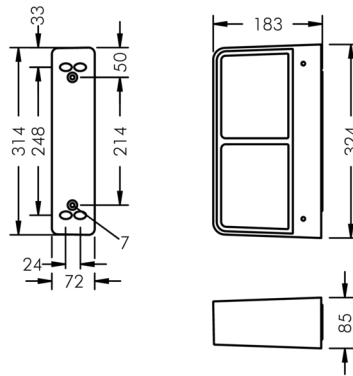





### Unit

8 364 166 199  
2 × 18,5 W, 4176 lm, 3000 K warm white, DALI,  
asymmetrical beam 63°

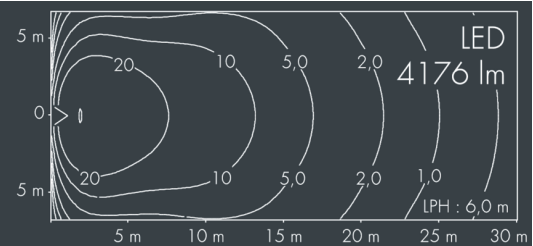

### Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, wall box with 2 stainless steel screws, wall box: 2 drilled holes Ø 7 mm, spacing 214 mm, cable gland: 4x Ø 7-10 mm, connecting terminal: 5 pole, highly efficient reflector, integral driver (DALI), CRI > 80, max 3 SDCM, service life L80/B20 > 50.000 h, luminous flux: 4176 lm, wattage: 37 W, delivered lumens 113 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,057 m², dimensions (L×H×W): 324 × 85 × 183 mm, weight 3.923 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK08

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

### Specification

|                            |                      |                             |                   |
|----------------------------|----------------------|-----------------------------|-------------------|
| Wattage                    | 37 W                 | Housing colour              | white RAL 9002    |
| Delivered lumens           | 113 lm/W             | Protection type             | IP65              |
| Light source               | LED 3000 K           | Protection class            | I                 |
| Color Rendering Index      | CRI > 80             | Impact resistance           | IK08              |
| Colour tolerance           | max 3 SDCM           | Windage area                | 0,057m²           |
| Lifetime ta 25° C          | L80/B20 > 50.000 h   | Dimensions                  | 324 × 85 × 183 mm |
| Control gear               | DALI                 | Weight                      | 3,92 kg           |
| Input voltage AC           | 220 – 240 V          | Max. ambient temperature ta | 35°               |
| Input voltage DC           | 220 – 240 V          |                             |                   |
| Voltage protection         | 2 kV L/N   4 kV L/PE |                             |                   |
| Luminaires per B16A / C16A | 50 / 85              |                             |                   |