

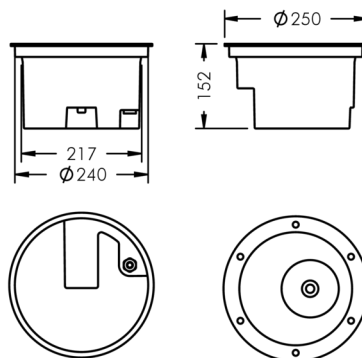


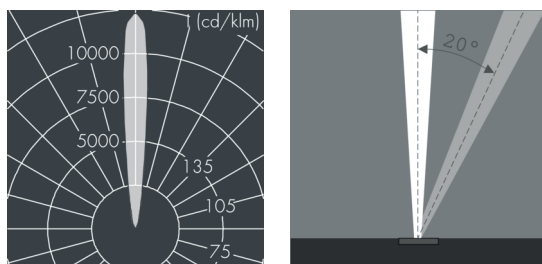

40 W, 3656 lm, 4000 K neutral white,
narrow beam, adjustable 11°

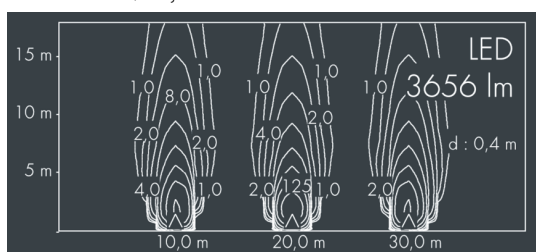

Beam angle (FWHM)	11°
Housing colour	black RAL 7021
Protection type	IP68
Protection class	I
Impact resistance	IK10
Dimensions	Ø 260 mm, width 152 mm
Weight	5,80 kg
Max. ambient temperature ta	35°