


Ecoline Mini

8 766 045 009  
6 × 1,8 W, 614 lm, 4000 K neutral white,  
wall washer 20° / 88° ,

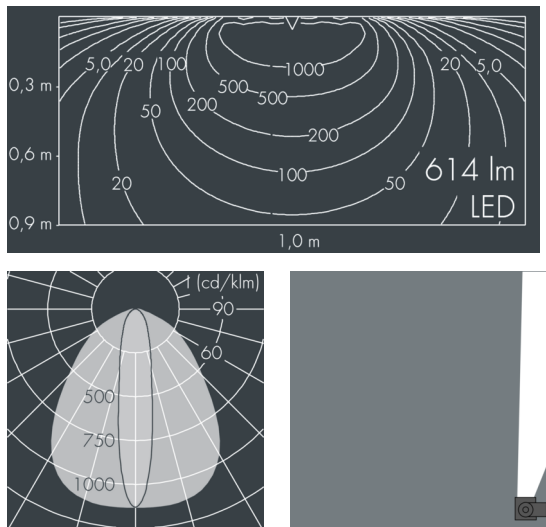

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification

Wattage	11 W
Delivered lumens	56 lm/W
Light source	LED 4000 K
Color Rendering Index	CRI > 80
Colour tolerance	max 2 SDCM
Lifetime ta 25° C	L90/B10 > 50.000 h
Control gear	on / off
Input voltage AC	220 – 240 V
Input voltage DC	195 – 240 V
Voltage protection	2 kV L/N   4 kV L/PE
Luminaires per B16A / C16A	50 / 85

Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, polycarbonate cover, with partial frosting for uniform light diffraction, silicon gasket, mounting flanges: 2 elongated holes Ø 6.5, spacing L2, tilt range: 220°, cable gland: M16 with 1 m cable Ho5RN-F3G1, connecting terminal: 3 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks , integral driver (AC/DC), CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 20° / 88°, luminous flux: 614 lm, wattage: 11 W, delivered lumens 56 lm/W, protection type IP65, protection class I, impact resistance IK10, windage area 0,025 m², dimensions (L×H×W): 668 × 43 × 40 mm, weight 1.5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK10