




Unit

8 364 165 099
2 × 18,5 W, 4385 lm, 4000 K neutral white,
asymmetrical beam 63°

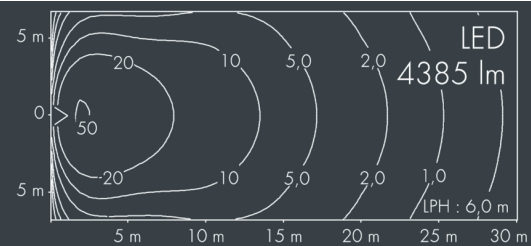

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, wall box with 2 stainless steel screws, wall box: 2 drilled holes Ø 7 mm, spacing 214 mm, cable gland: 4x Ø 7-10 mm, connecting terminal: 3 pole, highly efficient reflector, integral driver (AC/DC), CRI > 80, max 3 SDCM, service life L80/B20 > 50.000 h, luminous flux: 4385 lm, wattage: 37 W, delivered lumens 118 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,057 m², dimensions (L×H×W): 324 × 85 × 183 mm, weight 3.3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK08

Specification

Wattage	37 W	Housing colour	white RAL 9002
Delivered lumens	118 lm/W	Protection type	IP65
Light source	LED 4000 K	Protection class	I
Color Rendering Index	CRI > 80	Impact resistance	IK08
Colour tolerance	max 3 SDCM	Windage area	0,057m²
Lifetime ta 25° C	L80/B20 > 50.000 h	Dimensions	324 × 85 × 183 mm
Control gear	on / off	Weight	3,30 kg
Input voltage AC	220 – 240 V	Max. ambient temperature ta	35°
Input voltage DC	220 – 240 V		
Voltage protection	2 kV L/N 4 kV L/PE		
Luminaires per B16A / C16A	50 / 85		